
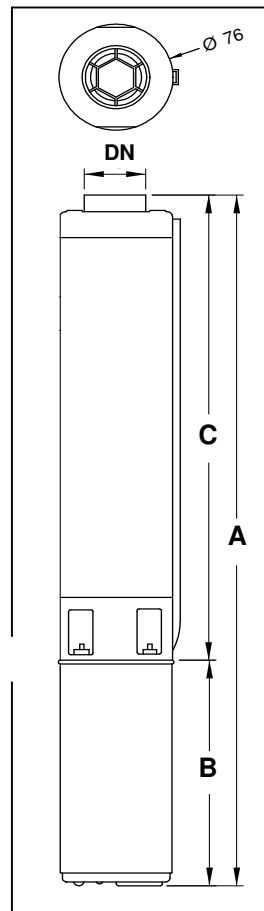


DB3 3 senkepumpe

50 Hz - 2800 rpm

Testad enligt ISO 9906

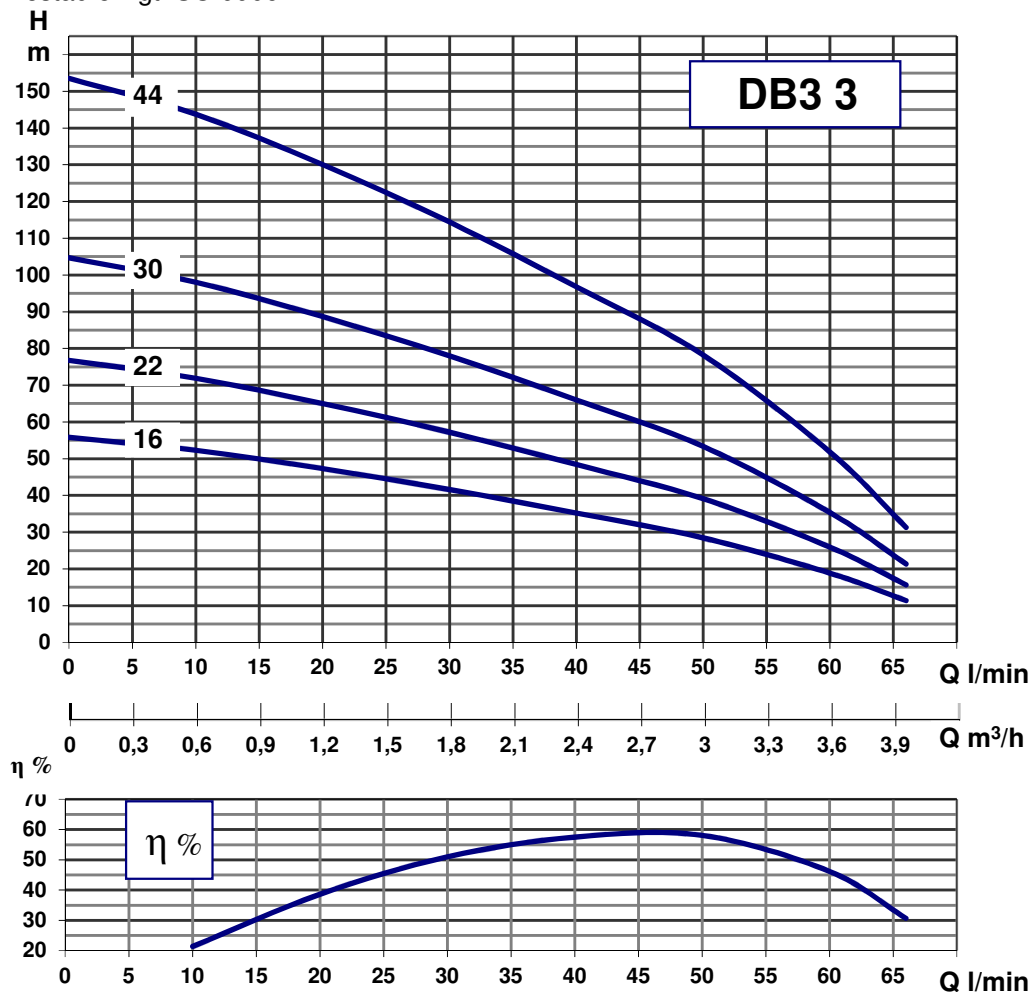

50 Hz - 2800 rpm

MODEL	50 Hz	MOTOR		2-W I start amp.	Q Mengde								Mål			
		kW	A		m³/h	0	0,6	1,2	1,8	2,4	3	3,6	4	A	B	C
DB3 3/16	1~220/230	0,37	3,8	8,8	56	52	47	42	35	28	19	11	923	377	546	1" 1/4
					0	10	20	30	40	50	60	66	923	377		
DB3 3/22	1~220/230	0,55	4,6	12,2	77	72	65	57	48	39	26	16	1075	397	678	1" 1/4
					0	10	20	30	40	50	60	66	1055	377		
DB3 3/30	1~220/230	0,75	5,9	14,5	105	98	89	78	66	53	35	21	1270	416	854	1" 1/4
					0	10	20	30	40	50	60	66	1251	397		
DB3 3/30	3~220	0,75	5	14,5	105	98	89	78	66	53	35	21	1270	416	854	1" 1/4
					0	10	20	30	40	50	60	66	1251	397		
DB3 3/44T	3~220/230 3~380/415	1,1	5,6 3,2	14,5	154	144	130	114	97	78	52	31	1619	416	1203	1" 1/4
					0	10	20	30	40	50	60	66	1619	416		